

Datasheet FG-201CV

Mass Flow Controller for Gases

> Introduction

Bronkhorst® EL-FLOW® Prestige model FG-201CV is a High Performance Multi-Fluid, Multi-Range Mass Flow Controller (MFC) offering precise control of virtually all conventional process gases. The versatile and user-friendly MFC consists of a thermal mass flow sensor, a precise control valve and a microprocessor based PID controller with signal and fieldbus conversion. As a function of a setpoint value, the flow controller swiftly adjusts the desired flow rate. The mass flow, expressed in normal litres or millilitres per minute or per hour, is provided as analog signal or digitally via RS232 or fieldbus. EL-FLOW® Prestige features a programmable pin (pin 5) at the 9-pin sub-D connector for customized I/O configurations. The flow range, wetted materials and orifice size for the control valve are determined depending of the type of gas and the process conditions of the application.



EL-FLOW Prestige Mass Flow Controller model FG-201CV

> Technical specifications

Measurement / control system

Accuracy (incl. linearity) (Based on actual calibration)	: $\pm 0,5\%$ Rd plus $\pm 0,1\%$ FS
Repeatability	: $< \pm 0,2\%$ Rd
Turndown	: 1 : 150 (in analog mode 1:50)
Multi Gas / Multi Range gases	: embedded gas data for Air, N ₂ , Ar, H ₂ , O ₂ , CO, CO ₂ , He, CH ₄ , SiH ₄ , NH ₃ , C ₂ H ₂ , C ₂ H ₄ , C ₂ H ₆ , C ₃ H ₆ #2 (propene), C ₂ F ₆ , C ₃ H ₈ , NF ₃ , N ₂ O, H ₂ S, Cl ₂ , SF ₆ , NO, Kr, Xe, plus any mixture of max. 5 of these gases
Settling time (controller)	: fast: < 500 msec standard: < 1 sec slow: < 2 sec
Control stability	: $\leq \pm 0,1\%$ FS (typical for 1 l _n /min N ₂)
Max. Kv-value	: $6,6 \times 10^{-2}$
Temperature range	: -10...+70°C
Temperature sensitivity	: zero: $\leq \pm 0,02\%$ FS/°C; span: $\leq \pm 0,025\%$ Rd/°C
Pressure sensitivity	: $< 0,15\%$ Rd/bar typical N ₂ ; $< 0,02\%$ Rd/bar N ₂ (incl. pressure correction option)
Leak integrity (outboard)	: tested $< 2 \times 10^{-9}$ mbar l/s He
Attitude sensitivity	: max. error at 90° off horizontal 0,07% FS at 1 bar, typical N ₂
Warm-up time	: 30 min. for optimum accuracy

Although all specifications in this datasheet are believed to be accurate, the right is reserved to make changes without notice or obligation.

Mechanical parts

Material (wetted parts)	: stainless steel 316L or comparable
Pressure rating	: 64 bar abs
Process connections	: compression type or face seal male
Seals	: standard : Viton®; options: EPDM, Kalrez®
Ingress protection (housing)	: IP40

Electrical properties


Power supply	: +15...24 Vdc $\pm 10\%$
Power consumption (based on N/C valve)	: Supply at voltage I/O at current I/O 15 V 202 mA 225 mA 24 V 128 mA 146 mA
Extra for fieldbus:	PROFIBUS DP: add 53 mA (15 V supply) or 30 mA (24 V supply) (if applicable) PROFINET: add 76 mA (15 V supply) or 48 mA (24 V supply) EtherCAT®: add 66 mA (15 V supply) or 41 mA (24 V supply) DeviceNet™: add 48 mA (24 V supply)
Analog output (0...100%)	: 0...5 (10) Vdc, min. load impedance > 2 k Ω ; 0 (4)...20 mA (sourcing), max. load impedance < 375 Ω
Analog setpoint (0...100%)	: 0...5 (10) Vdc, min. load impedance > 100 k Ω ; 0 (4)...20 mA, load impedance ~ 250 Ω
Digital communication	: standard RS232; options: PROFIBUS DP, DeviceNet™, EtherCAT, PROFINET, Modbus RTU/ASCII, FLOW-BUS

> Ranges (based on N₂)

Model	minimum	maximum
FG-201CV	0,14...7 ml _n /min	0,16...20 l _n /min

Intermediate ranges are available

> Model number identification

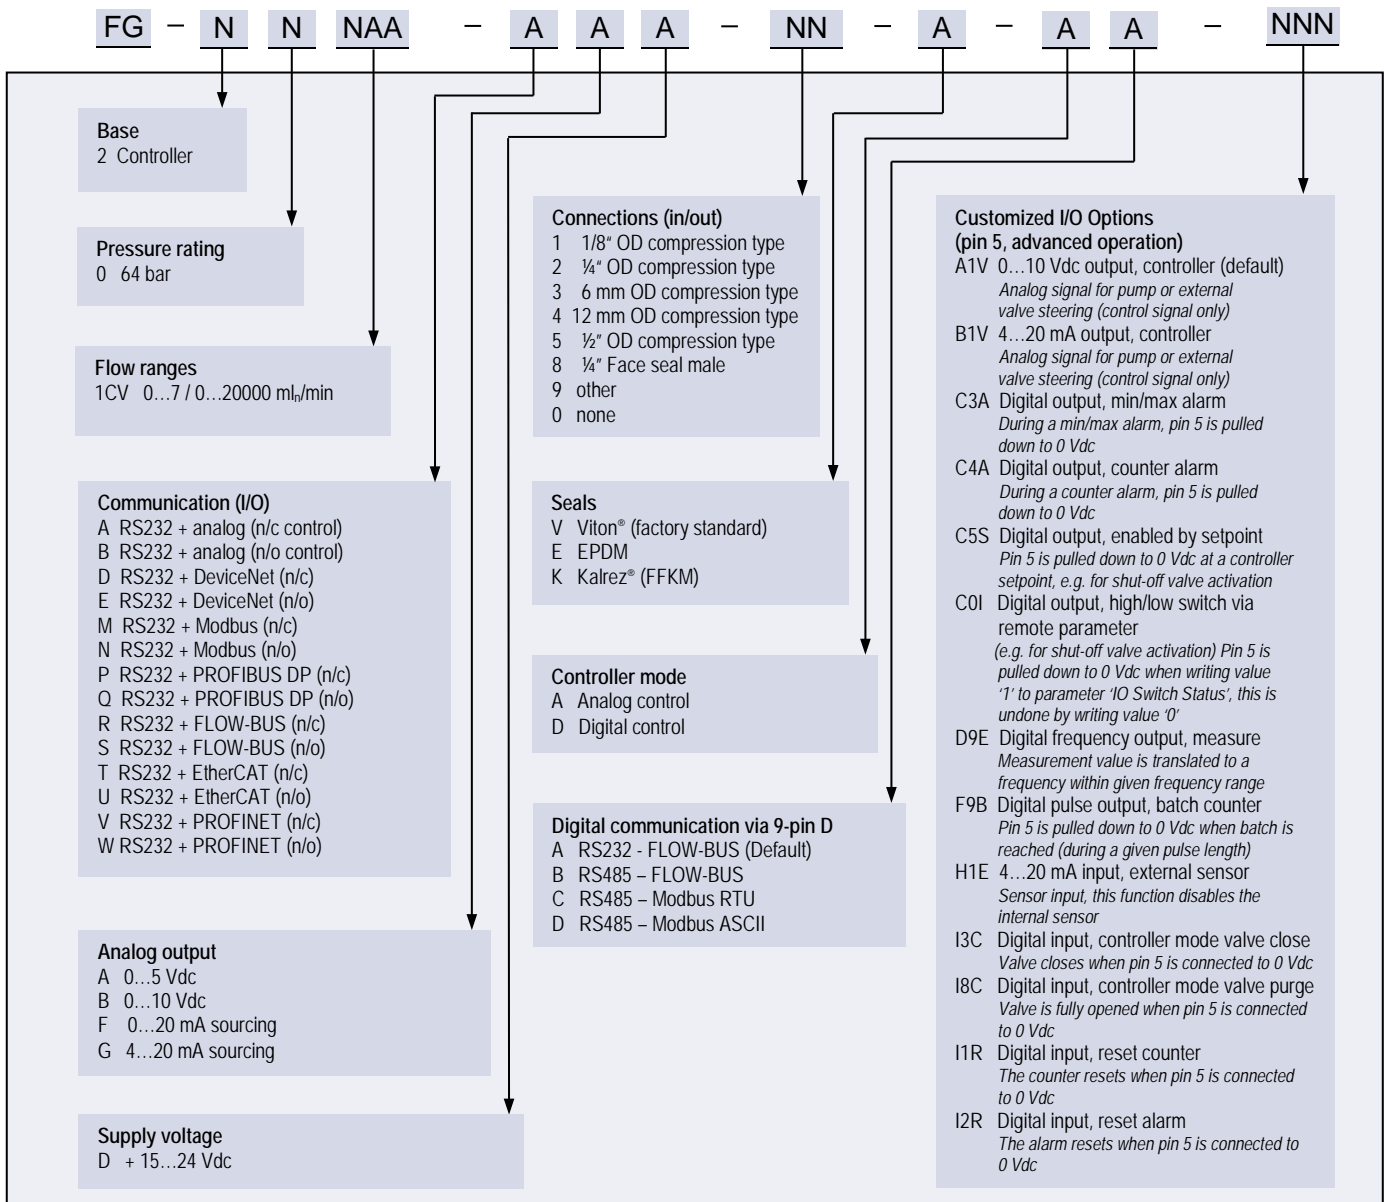


> Mass flow measuring principle (DTB)


The heart of the thermal mass flow meter/controller is the sensor, that consists of a stainless steel capillary tube fitted with two combined windings for heating and temperature measurement, and an additional temperature sensor for sensor stability. The two windings are electrically powered to warm up the tube above ambient temperature. As long as there is no gas flow, the power required to warm up the windings evenly is equal for both windings, resulting in a zero value measured by the flow sensor.

When gas is flowing, the resistance of the laminar flow element ensures that a small proportional portion of the flow is fed to the sensor. This cold gas cools the first sensor winding. In order to maintain a constant average temperature over the first winding, the power to this winding is increased to provide additional heat. The second winding sees that the gas has been warmed up, so the power to the second winding is decreased to maintain a constant average temperature over this winding.

The power difference between the two windings is a direct measure for the mass flow - which is the Differential Temperature Balancing (DTB) principle, as shown in below picture. In the main channel Bronkhorst applies a patented Laminar Flow Element (LFE) consisting of a stack of stainless steel discs with precision-etched flow channels. Thanks to the perfect flow-split the sensor output is proportional to the total mass flow rate.

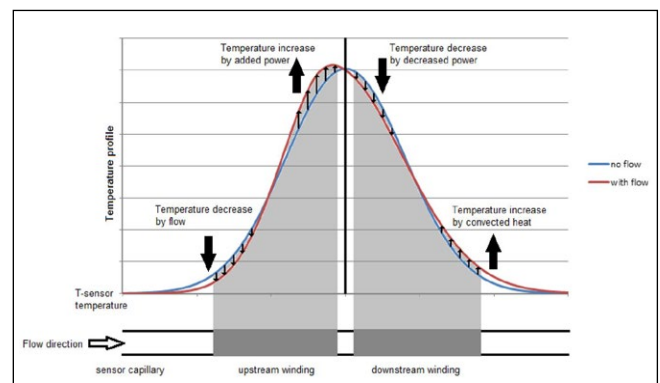


> Hook-up diagram for analog or RS232 communication

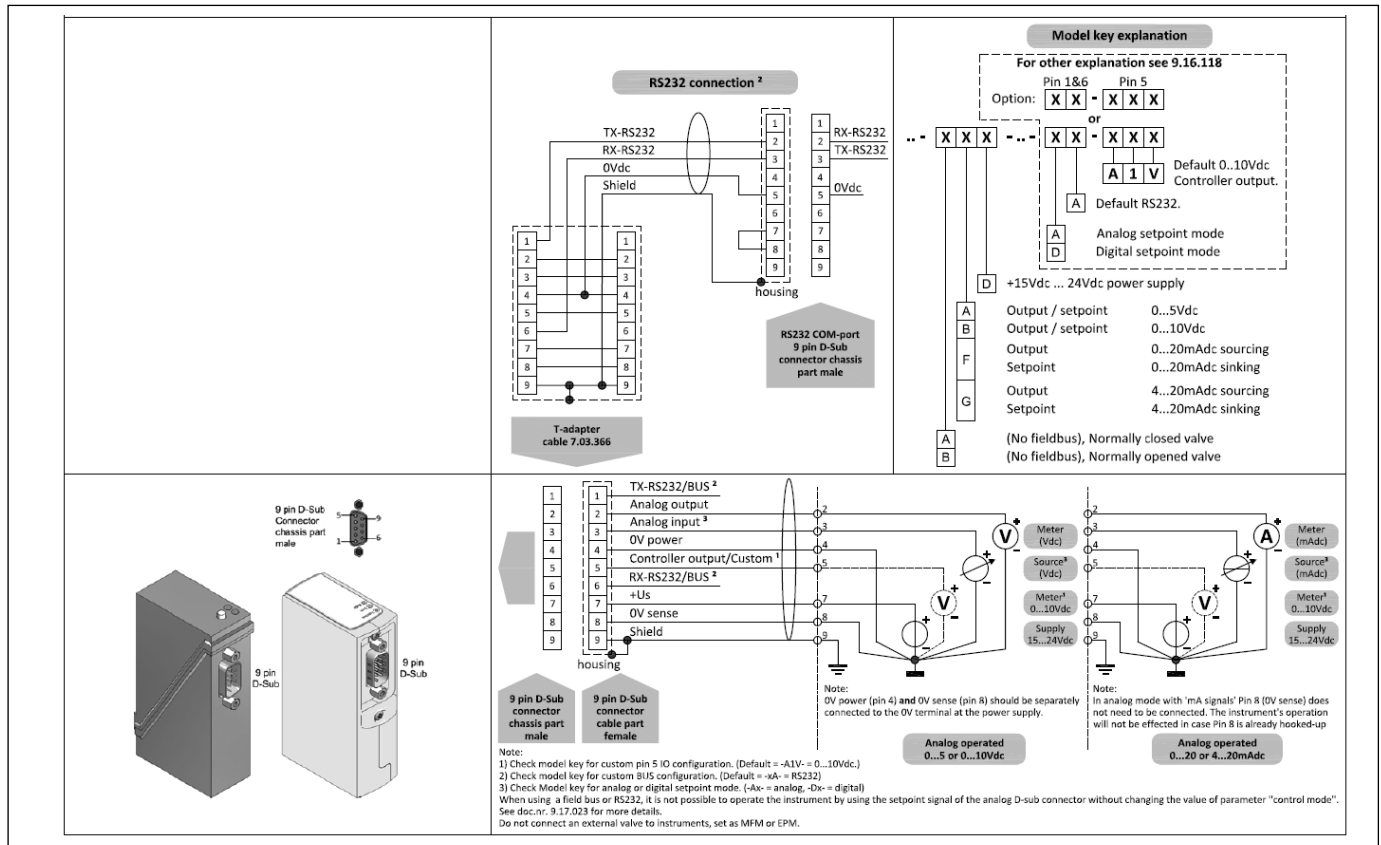


> Hook-up diagrams for fieldbus communication

For the available fieldbus options we refer to the various hook-up diagrams as indicated below. If you are viewing this datasheet in digital format, you may use the hyperlink to each of the drawings. Otherwise please visit the download section on www.bronkhorst.com or contact our local representatives.

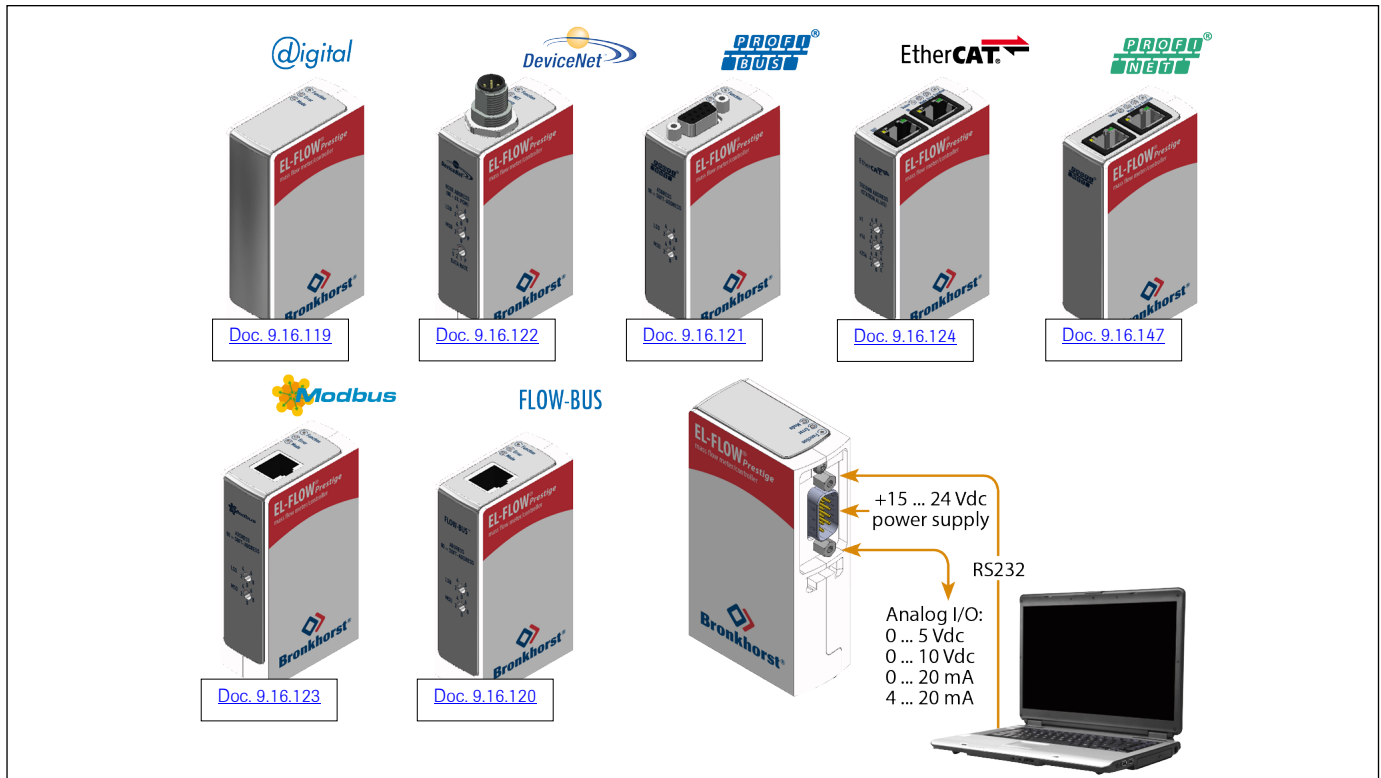


> Dimensions (mm) and weight (kg)

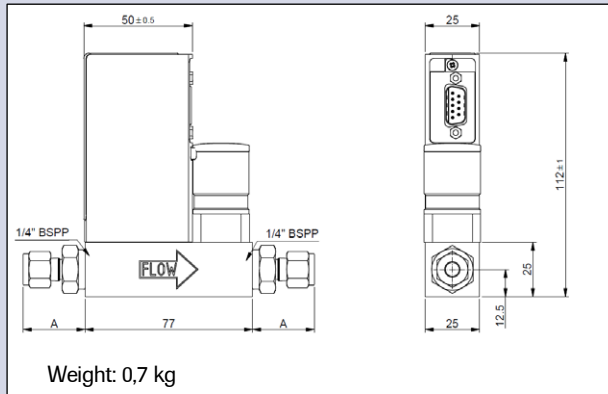

Dimension table adapters (RS-type)

Compression type	1/4" BSPP	
	Size A	
adapter 3 mm OD	26.1	
adapter 6 mm OD	28.4	
adapter 8 mm OD	29.4	
adapter 10 mm OD	30.2	
adapter 12 mm OD	32.5	
adapter 1/8" OD	26.1	
adapter 1/4" OD	28.4	
adapter 3/8" OD	29.9	
adapter 1/2" OD	32.7	
Face-seal male	Size A	
adapter 1/4" inlet	23.2	



*) Dimension A is typical finger-tight.

> Options and accessories

<ul style="list-style-type: none"> - Free configuration software for Multi-Gas / Multi-Range functionality. - Free software support for operation, monitoring, optimizing or to interface between digital instruments and windows software. 	
<ul style="list-style-type: none"> - IN-LINE filters for protection against particulates 	
<ul style="list-style-type: none"> - BRIGHT compact local Readout/Control modules - E-8000 Power Supply/Readout systems 	
<ul style="list-style-type: none"> - Interconnecting cables for power and analog/digital communication - PiPS Plug-in Power Supply 	

> Alternatives

<ul style="list-style-type: none"> - EL-FLOW Prestige Mass Flow Meter (MFM), model FG-111B, ranges from 0,14-7 ml_r/min up to 0,4-20 l_r/min 	
<ul style="list-style-type: none"> - EL-FLOW Prestige MFC with integrated 24V shut-off valve, model FG-201CS, ranges from 0,14-7 ml_r/min up to 0,4-20 l_r/min 	
<ul style="list-style-type: none"> - EL-FLOW Select series MFC, model F-201CV, ranges from 0,16-8 ml_r/min up to 0,16-25 l_r/min 	
<ul style="list-style-type: none"> - Metal sealed MFC for Semiconductor or other high purity applications - Mass Flow Controller for standardised modular platform systems (top-mount version) 	
<ul style="list-style-type: none"> - Pre-assembled multi-channel solutions: series FLOW-SMS 	